




Different applications possible when using Maxi flap fittings are shown from page **253**



See page **258** for soft-closing mechanism, push magnetic door catch and other accessories to suit the Maxi lid stay

Maxi lid stay


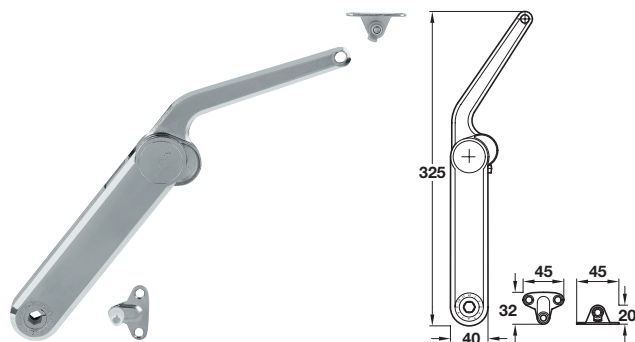


- > Opening angles: 75°, 90° or 110°
- > With power assisted opening
- > Unhanded design
- > Clip-mounting on pre-mounted screw fixing brackets included, no tools required
- > Installation instructions included
- > Height ± 2 mm, side $+3/-1$ mm, tilt ± 1.5 mm and holding power adjustment with SW10 Allen key facility
- > Nickel-plated zinc alloy lid stay, nickel-plated steel screw-fixing brackets, plastic hinge cover and adjusting screw
- > Order fixing screws separately
- > Order qty: 1 pc

Wooden lid flap





Lid flap with aluminium frame




No tools required for attaching the lid stay - stay clip mounts onto bracket

Adjusting the braking effect



Screw-on bracket for fixing to the carcase side panel



Angled foot bracket for fixing to flaps made of wood



Model	Distance from edge	White	Black	Nickel-plated
-------	--------------------	-------	-------	---------------

Wooden flaps and flaps with aluminium frame, from frame width 45 mm

A	37 mm	373.69.742	373.69.342	373.69.512
B	37 mm	373.69.744	373.69.344	373.69.412
C	37 mm	373.69.746	373.69.346	373.69.712
D	37 mm	373.69.748	373.69.348	373.69.312

Flaps with aluminium frame, frame width 20 mm

A	37 mm	-	-	373.69.502
B	37 mm	-	-	373.69.402
C	37 mm	-	-	373.69.702
D	37 mm	-	-	373.69.302