


# LOOX 12V REMOTE RECEIVER

For control of white LED lights. Premium version has a six output channel distributor, Basic version has a four output channel distributor. Both can be used with the remote switch which is compatible with 12V and 24V systems.

## 12V SYSTEM

### Loox 12V premium 6-channel radio receiver and remote control

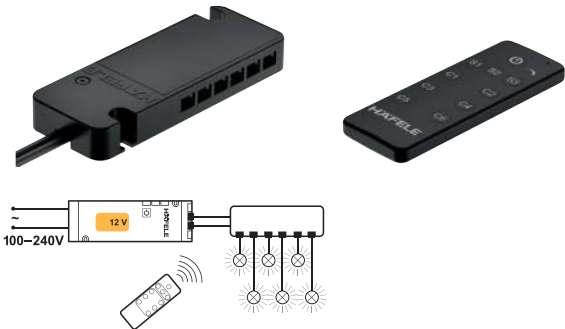


- > 3 lighting scenarios can be stored
- > Several radio receivers can be controlled within a radius of 15 m
- > Wattage: 60W (Max. 30W per socket)
- > 6 slots for consumers
- > Soft on/off with dimmer function
- > Connects to Loox 12V driver via 2 leads
- > Black plastic
- > Order qty: 1 pc



- ! > For control of white LED lights
- ! > Not suitable for multi white or RGB LED lights
- ! > Max. 10 radio receivers can be combined

	Remote receiver	Remote control
Cat. No.	833.73.741	833.89.121

### Loox 12V basic 4-channel radio receiver and remote control

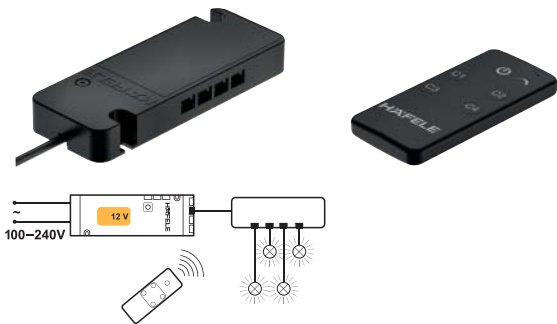

- > Several radio receivers can be controlled within a radius of 15 m
- > Wattage: 30W (Max. 30W per socket)
- > 4 slots for consumers
- > Soft on/off with dimmer function
- > Connects to Loox 12V driver via 2 leads
- > Black plastic
- > Order qty: 1 pc



- ! > For control of white LED lights
- ! > Not suitable for multi white or RGB LED lights
- ! > Max. 10 radio receivers can be combined

	Remote receiver	Remote control
Cat. No.	833.73.740	833.89.120

### Loox remote switch and bezel



- > To control all channels or one channel of Loox radio receiver for white LEDs
- > For recess mounting, press-fit in Ø 40 mm hole
- > For surface mounting, order bezel separately
- > Height: 14.4 mm
- > Several radio receivers can be controlled within a radius of 15 m
- > Soft on/off
- > Silver coloured plastic
- > Order qty: 1 pc



- + Bezel for surface mounting of remote switch must be ordered separately

	Remote switch	Bezel
Cat. No.	833.89.122	833.89.123

Lighting: Loox 12V LED

5

TCH DESIGN 2017, © Häfele U.K. Ltd 2017. Dimensional data not binding. We reserve the right to alter specifications without notice.

PAGE AMENDED  
19.12.17/1

# LOOX 12V REMOTE RECEIVER


For control of white LED lights. Premium version has a six output channel distributor, Basic version has a four output channel distributor. Both can be used with the remote switch which is compatible with 12V and 24V systems.

## 12V SYSTEM

5

Lighting: Loox 12V LED

### Loox 12V premium 6-channel radio receiver and remote control

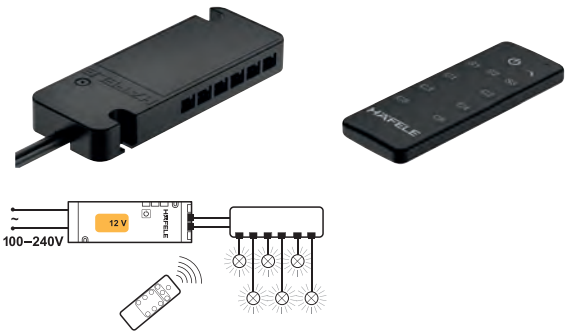


- > 3 lighting scenarios can be stored
- > Several radio receivers can be controlled within a radius of 15 m
- > Wattage: 60W (Max. 30W per socket)
- > 6 slots for consumers
- > Soft on/off with dimmer function
- > Connects to Loox 12V driver via 2 leads
- > Black plastic
- > Order qty: 1 pc



- > For control of white LED lights
- > Not suitable for multi white or RGB LED lights
- > Max. 10 radio receivers can be combined

	Remote receiver	Remote control
Cat. No.	833.73.741	833.89.121

### Loox 12V basic 4-channel radio receiver and remote control

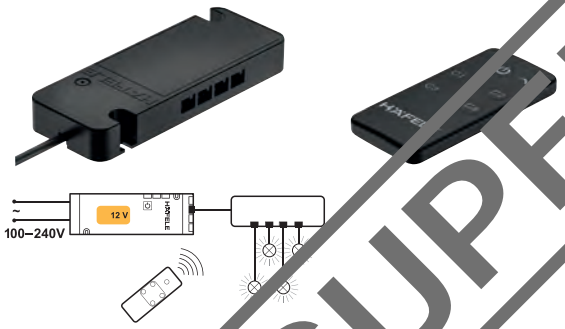

- > Several radio receivers can be controlled within a radius of 15 m
- > Wattage: 30W (Max. 30W per socket)
- > 4 slots for consumers
- > Soft on/off with dimmer function
- > Connects to Loox 12V driver via 2 leads
- > Black plastic
- > Order qty: 1 pc



- > For control of white LED lights
- > Not suitable for multi white or RGB LED lights
- > Max. 10 radio receivers can be combined

	Remote receiver	Remote control
Cat. No.	833.73.740	833.89.120

### Loox remote switch and bezel



- > To control all channels or one channel of Loox radio receiver for white LEDs
- > For recess mounting, press-fit in Ø 40 mm hole
- > For surface mounting, order bezel separately
- > Height: 14.4 mm
- > Several radio receivers can be controlled within a radius of 15 m
- > Soft on/off
- > Silver coloured plastic
- > Order qty: 1 pc



- Bezel for surface mounting of remote switch must be ordered separately

	Remote switch	Bezel
Cat. No.	833.89.122	833.89.123

TCH DESIGN 2017. © Häfele U.K. Ltd 2017. Dimensional data not binding. We reserve the right to alter specifications without notice.