

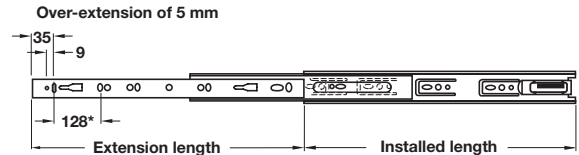


Accuride 3832-SC front disconnect drawer runners, full extension self closing

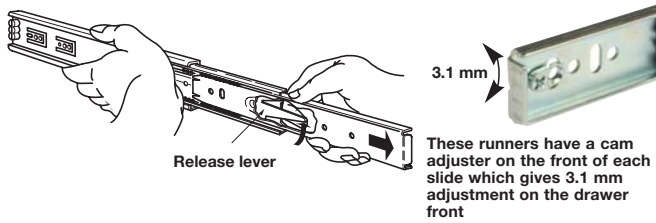

The correct side space dimension is critical for the runner to work. You must allow between +0.2mm and +0.5mm over the runner thickness.




*Hole not available on 300 mm length



Optional brackets for bottom or shelf mounting of these runners are available, see page 242 for details

- > Side mounting
- > For use in applications such as filing cabinets, desk pedestals and general storage drawers
- > Load carrying capacity up to 50 kg (see below for individual runner capacity)
- > Front disconnect (by depressing lever) for drawer removal
- > Hold-in feature holds the closed drawer in
- > Self-closing mechanism included
- > 32 mm drilling pattern
- > Tolerance absorption tabs
- > Improved retainer retention device
- > Grooved cabinet member, for better movement
- > Zinc-plated steel
- > Order fixing screws separately (max. head height 2.5 mm, Ø 9.6 mm)
- > Order qty: 1 pair





Installed length	Extension length	Load capacity	Bright	White	Black
Accuride 3832-SC, self closing		Tested cycles 80,000 (10,000)			
300 mm	286 mm	42 kg (48 kg)	422.59.931	-	422.59.331
350 mm	356 mm	43 kg (49 kg)	422.59.936	422.59.736	422.59.336
400 mm	406 mm	44 kg (50 kg)	422.59.941	422.59.741	422.59.341
450 mm	457 mm	45 kg (50 kg)	422.59.946	422.59.746	422.59.346
500 mm	508 mm	45 kg (50 kg)	422.59.951	-	422.59.351
550 mm	559 mm	45 kg (50 kg)	422.59.956	422.59.756	-
600 mm	610 mm	45 kg (50 kg)	422.59.961	422.59.761	-

Approved by Product Info. Dept.



PAGE AMENDED
25.02.19/1

FOR OUR FULL PRODUCT RANGE VISIT HAFELE.CO.UK


Accuride 3832-SC front disconnect drawer runners, full extension self closing

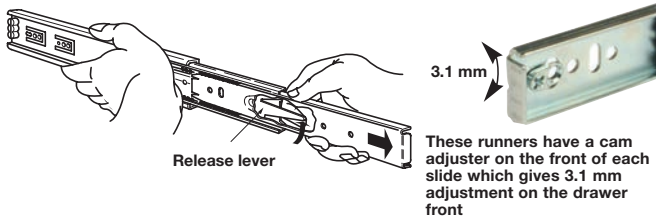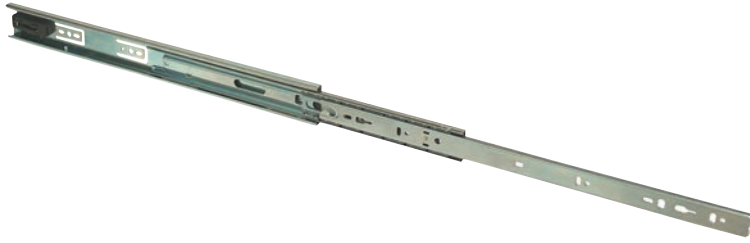

For optimum performance allow between +0.2mm and +0.5mm over the nominal runner thickness, for the runner space.

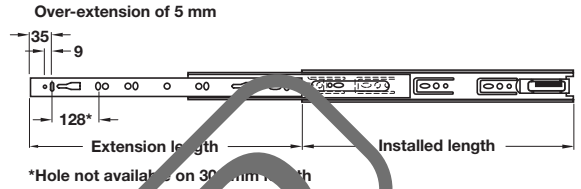

Optional brackets for bottom or shelf mounting of these runners are available, see page 242 for details

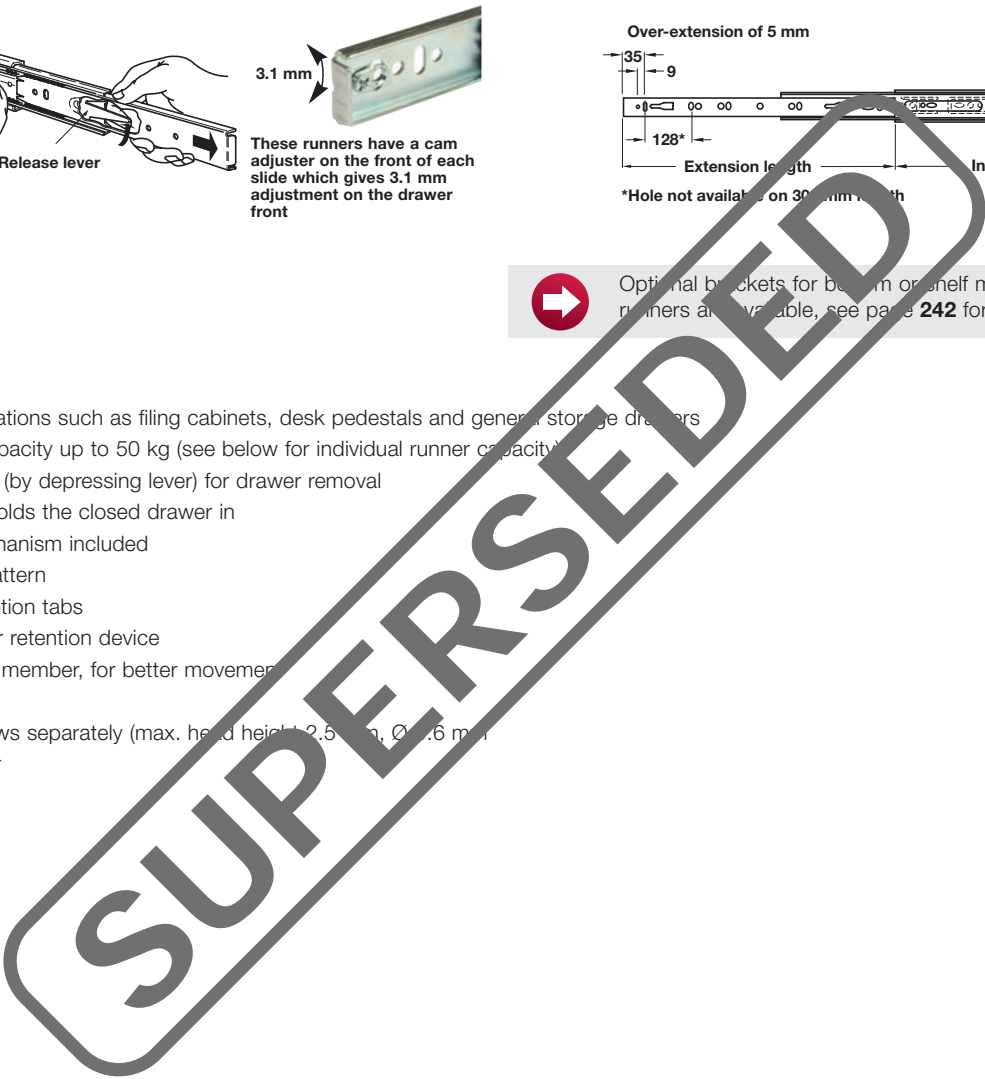

- > Side mounting
- > For use in applications such as filing cabinets, desk pedestals and general storage drawers
- > Load carrying capacity up to 50 kg (see below for individual runner capacity)
- > Front disconnect (by depressing lever) for drawer removal
- > Hold-in feature holds the closed drawer in
- > Self-closing mechanism included
- > 32 mm drilling pattern
- > Tolerance absorption tabs
- > Improved retainer retention device
- > Grooved cabinet member, for better movement
- > Zinc-plated steel
- > Order fixing screws separately (max. head height 2.5 mm, Ø 4.6 mm)
- > Order qty: 1 pair

Full Extension

TESTED 80,000 CYCLES

FIXINGS REQUIRED VARIANTA Ø5

FIXINGS REQUIRED HOSPA Ø 4.0

Installed length	Extension length	Load capacity	Bright	White	Black
Accuride 3832-SC, self closing		Tested cycles 80,000 (10,000)			
300 mm	286 mm	42 kg (48 kg)	422.59.931	-	422.59.331
350 mm	356 mm	43 kg (49 kg)	422.59.936	422.59.736	422.59.336
400 mm	406 mm	44 kg (50 kg)	422.59.941	422.59.741	422.59.341
450 mm	457 mm	45 kg (50 kg)	422.59.946	422.59.746	422.59.346
500 mm	508 mm	45 kg (50 kg)	422.59.951	-	422.59.351
550 mm	559 mm	45 kg (50 kg)	422.59.956	422.59.756	-
600 mm	610 mm	45 kg (50 kg)	422.59.961	422.59.761	-

TOH TECHNOLOGY 2018, © Hafele U.K. Ltd 2018. Dimensional data not binding. We reserve the right to alter specifications without notice.