




Accuride 3832TR ball bearing touch release drawer runners

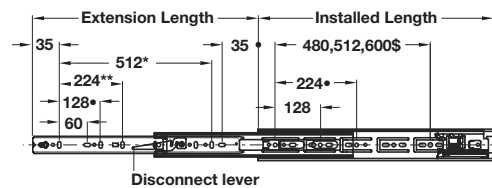

The correct side space dimension is critical for the runner to work. You must allow between +0.2mm and +0.5mm over the runner thickness.



- Not available on the 300mm length
- * Only on 650 and 700 mm lengths
- ** Only on 550 mm lengths upwards


\$ 480 mm on 600 mm length
512 mm on 650 mm length
544 mm on 700 mm length

- > Full extension, telescopic, side mounted
- > Load carrying capacity up to 45 kg (see below for individual runner capacity)
- > Push on the drawer front to open or close the drawer
- > Opening mechanism activated by travel inward
- > Propels drawers open approximately 50-125 mm from the closed position
- > Hold-in feature holds the closed drawer in
- > Front disconnect (by depressing lever) for drawer removal
- > Cam drawer adjust feature
- > Please note maximum drawer width to be used
- > Zinc-plated steel
- > Order fixing screws separately (max. head height 2.5 mm, Ø 9.6 mm)
- > Order qty: 1 pair





Installed length	Extension length	Max. drawer width	Load capacity	Bright	Black	White
Accuride 3832-TR Touch Release (activation force 5 kg)						
300 mm	305 mm	300 mm	42 kg	422.04.335	422.04.336	422.04.337
350 mm	356 mm	350 mm	43 kg	422.04.385	422.04.386	422.04.387
400 mm	406 mm	400 mm	44 kg	422.04.435	422.04.436	422.04.437
450 mm	457 mm	450 mm	45 kg	422.04.485	422.04.486	422.04.487
500 mm	508 mm	500 mm	45 kg	422.04.535	422.04.536	422.04.537
550 mm	559 mm	550 mm	45 kg	422.04.585	422.04.586	422.04.587
600 mm	610 mm	600 mm	45 kg	422.04.635	422.04.636	422.04.637
650 mm	660 mm	600 mm	44 kg	422.04.685	-	422.04.687
700 mm	711 mm	600 mm	43 kg	422.04.735	422.04.736	422.04.737

Accuride 3832TR ball bearing touch release drawer runners




For optimum performance allow between +0.2mm and +0.5mm over the nominal runner thickness, for the runner space.

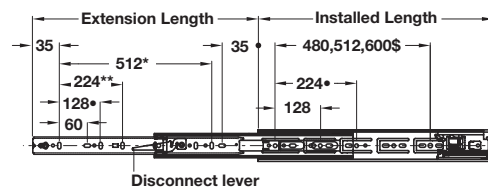

- Not available on the 300mm length
- * Only on 650 and 700 mm lengths
- ** Only on 550 mm lengths upwards

\$ 480 mm on 600 mm length
512 mm on 650 mm length
544 mm on 700 mm length

- > Full extension, telescopic, side mounted
- > Load carrying capacity up to 45 kg (see below for individual runner capacity)
- > Push on the drawer front to open or close the drawer
- > Opening mechanism activated by travel inward
- > Propels drawers open approximately 50-125 mm from the closed position
- > Hold-in feature holds the closed drawer in
- > Front disconnect (by depressing lever) for drawer removal
- > Cam drawer adjust feature
- > Please note maximum drawer width to be used
- > Zinc-plated steel
- > Order fixing screws separately (max. head height 2.5 mm, Ø 9.6 mm)
- > Order qty: 1 pair



Installed length	Extension length	Max. drawer width	Load capacity	Bright	Black	White
Accuride 3832-TR Touch Release (activation force 5 kg)						
300 mm	305 mm	300 mm	42 kg	422.04.335	422.04.336	422.04.337
350 mm	356 mm	350 mm	43 kg	422.04.385	422.04.386	422.04.387
400 mm	406 mm	400 mm	44 kg	422.04.435	422.04.436	422.04.437
450 mm	457 mm	450 mm	45 kg	422.04.485	422.04.486	422.04.487
500 mm	508 mm	500 mm	45 kg	422.04.535	422.04.536	422.04.537
550 mm	559 mm	550 mm	45 kg	422.04.585	422.04.586	422.04.587
600 mm	610 mm	600 mm	45 kg	422.04.635	422.04.636	422.04.637
650 mm	660 mm	600 mm	44 kg	422.04.685	-	422.04.687
700 mm	711 mm	600 mm	43 kg	422.04.735	422.04.736	422.04.737